

Fixture #

SPECIFICATIONS:

Double compartment infection control surgeon scrub station, compartment divider, exposed surfaces finished to a satin finish. Removable front access panel. Sloped surfaces to reduce free-standing water. Radius coved bowl corners.

6420Z includes antimicrobial coating.

OVERALL DIMENSIONS:

Left to Right: 40" (102cm)
Front to Back: 19 3/4" (50cm)

BOWL DIMENSIONS:

Left to Right: 37 1/2" (95cm)
Front to Back: 13 1/2" (34cm)
Bowl depth: 10" (25cm)

MATERIAL:

16 gauge, 18-10 stainless steel
304 Series

WASTE:

Integrally welded 1 1/2" stainless steel with open waste hole. Will not accept any additional waste fittings.


Location: Center

HOLE DRILLINGS:

All Surgeon Scrub Stations are punched to the customer's specification. Please provide a sketch of the faucet hole requirements including:

- The location of where the faucet hole(s) is required including dimensions
- Diameter of the hole(s)

Please note that once punched with faucet holes, all Surgeon Scrub Stations are non-returnable.

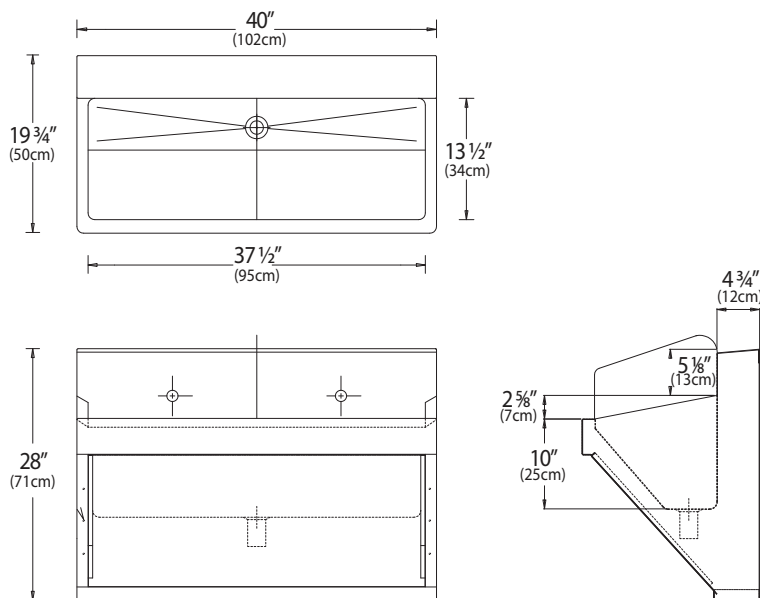

PROJECT INFORMATION:

Item Location: _____
Project Number: _____
Project Name: _____
Quote Number: _____
Faucet Model: _____
Notes: _____

Engineer's Approval

Novanni has a policy of continuous improvement.
All product specifications may change without notice.